

OMEX

Power Transmission Equipments

D G C
Series

Gear Couplings



OMEX

Dharam Power Transmission Equipments Pvt. Ltd.

Omex Curved Tooth Flexible Gear Couplings are the result of many years of experience in the field of Mechanical Power Transmission.

These Gear Couplings are distinguished by their mechanical flexibility and compensation of Angular, Parallel and Axial misalignments of the connected shafts. They are made for extensive use in Metal Rolling Mills, Paper Machinery, Cranes, Dredgers, Rubber and Plastic Industries, Cement Plants, Conveyors and Elevators, Compressors, Fans and Blowers, Screens and other general industries.

Flexible Gear Couplings basically consist of two hubs, with crowned external teeth and two outer sleeves with internal spur teeth.

Gear Hubs and the outer sleeves are manufactured from carbon steel and are hardened to the required degree. They are machined to fine tolerances for proper meshing of the gears as well as for inter-changeability.

HUBS :

The teeth of Gear Hubs are crowned and are generated by involute system. The amount of crowning and backlash values are so chosen as to ensure the best results in torque transmission, greater flexibility and smooth operations.

SLEEVES :

The internal teeth of the sleeves are generated to ensure correct profile. The coupling sleeves are joined together with high tensile steel bolts (class 8.8 IS : 1367) fitted using a gasket in between them.

'O' RINGS :

The setting of special 'O' Rings at the ends of coupling hubs prevents leakage of lubricants and entry of dust. The 'O' rings can also withstand high degree of temperature upto 120°C

SEAL CARRIERS :

Seal carriers have been provided for sizes from DGC 11 to DGC 19 facilitate inspection and replacement of 'O' rings without disturbing the alignment.

POWER RATINGS :

The normal power ratings are given in the Table. For selection of the correct size of couplings, proper service factor depending on the type of machines and the peak load should be considered.

SERVICE FACTOR :

Generally, for medium duty use a service factor of 1.5. For heavy duty use a factor of 2 and for extra heavy duty a factor of 3 should be used. **For special applications please contact Omex with full details.**


LUBRICATION :

The coupling must be filled with grease or oil. It is recommended to use grease where the maximum temperature is within 80°C and for temperature above 80°C, oil should be used. When using grease it is suggested to fill the coupling completely with Lithium based grease with EP additives (NLGI-No.1 consistency). When the coupling is to be filled with oil, fill half the coupling with EP Gear Oil.


RECOMMENDATION FOR GREASE & OIL:

Grease : Indian Oil - Servogem EP 1 or equivalent.


Oil : Indian Oil - Servomesh SP 680 or equivalent.

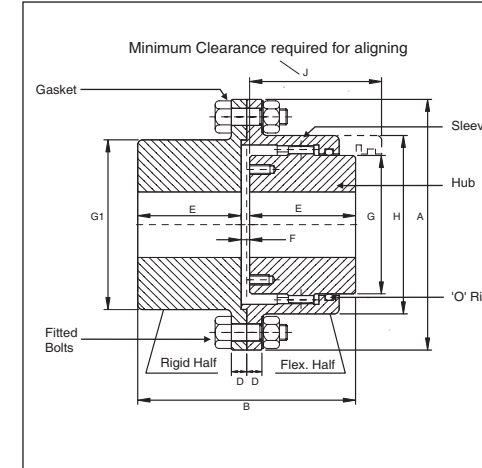

HALF FLEXIBLE COUPLINGS

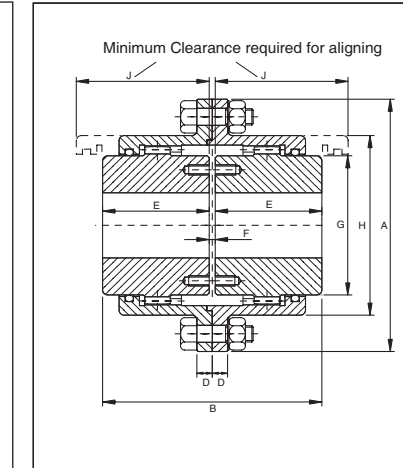

COUPLINGS SIZES 1 To 10

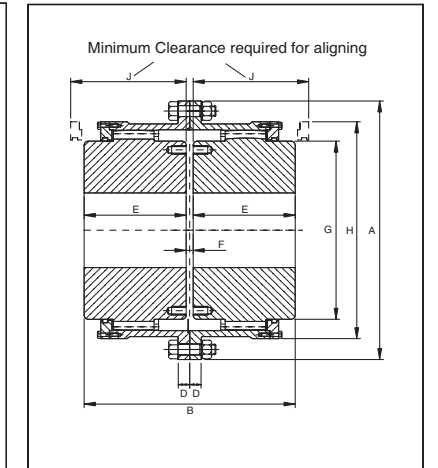

COUPLINGS SIZES 11 To 19

Coupling No / Size	Power at 100 rpm in Kw	Maximum Torque in Nm	Hub Bore (mm)			Dimensions (mm)										Maximum Speed RPM	Approx. Weight in Kg.		Approx. Gd ² Value in Kg M ²		Clamping Bolt Size	No. Of Bolts	Max. Misalignment Capacity			Amount of Grease / Oil	
			Flex		Rigid	A	B	D	E	F	G	G 1	H	J	Full Flex		Half Flex	Full Flex	Half Flex	Parallel (mm)			Axial Float (mm)	Angular per Gear Mesh	Kg.	Ltr.	
			Min.	Max	Max																						
DGC 1	11.5	1100	14	55	60	170	115	17	55	5	78	90	110	65	6700	11	10.5	0.14	0.11	M12 X 50	6	0.80	0.5	1.5°	0.25	0.20	
DGC 2	28.5	2720	20	60	75	185	145	17	70	5	85	110	125	85	6100	16	15	0.21	0.18	M12 X 50	6	0.95			0.50	0.40	
DGC 3	51.5	4920	30	75	90	220	175	20	85	5	107	130	150	105	5200	26	26	0.45	0.44	M16 X 60	6	1.10			0.80	0.60	
DGC 4	96.5	9220	40	100	110	250	215	20	105	5	138	160	178	125	4500	41	42	0.98	0.88	M16 X 60	8	1.30			1.00	0.80	
DGC 5	150	14320	46	120	130	290	240	25	115	10	166	185	204	140	3950	63	63	1.90	1.90	M20 X 75	8	1.45			1.80	1.50	
DGC 6	230	21960	50	125	150	320	260	25	125	10	176	215	230	155	3500	86	87	3.05	3.06	M20 X 75	8	1.55	2.40	2.00			
DGC 7	390	37250	60	145	170	350	290	25	140	10	208	240	260	175	3250	120	120	5.25	5.20	M20 X 75	10	1.80	3.50	3.00			
DGC 8	515	49180	70	165	200	380	330	25	160	10	230	285	290	200	3000	165	170	8.52	8.63	M20 X 75	12	1.90	4.00	4.00			
DGC 9	644	61500	80	200	220	430	340	25	165	10	270	315	332	210	2600	210	220	15.00	15.00	M24 X 80	10	2.25	5.50	5.00			
DGC 10	930	88800	100	230	260	490	370	25	180	10	315	370	390	230	2300	310	320	28.67	29.00	M24 X 80	12	2.60	8.50	8.00			
DGC 11	1265	120800	110	260	280	545	410	30	200	10	350	380	445	270	2100	454	430	52.00	46.18	M24 X 90	12	3.30	12.50	12.00			
DGC 12	1600	152800	150	300	310	590	490	30	240	10	404	420	490	300	1900	630	590	88.60	76.57	M24 X 90	14	3.50	14.00	16.00			
DGC 13	2880	275000	160	330	340	680	535	35	260	15	442	480	555	320	1550	887	850	155.00	140.00	M30X110	14	6.65	16.00	20.00			
DGC 13A	3980	380000	200	340	370	730	575	35	275	25	470	520	595	350	1400	1050	1050	215.00	203.00	M30X110	16	7.35	18.00	24.00			
DGC 14	3980	380000	200	370	370	730	575	35	280	15	500	520	610	340	1400	1097	1050	230.00	203.00	M30X110	16	7.35	18.00	24.00			
DGC 14A	4765	455000	230	360	400	780	635	35	305	25	510	560	640	375	1350	1310	1350	300.00	305.00	M30X110	18	8.15	25.00	33.00			
DGC 15	4765	455000	230	410	400	780	655	40	320	15	540	560	660	385	1350	1440	1350	352.00	305.00	M30X110	18	8.15	25.00	33.00			
DGC 16	6800	650000	260	450	460	900	720	40	350	25	630	650	750	425	1150	2120	2000	670.00	611.20	M36X120	18	8.55	40.00	49.00			
DGC 16A	8375	800000	300	490	530	1000	815	40	395	25	700	750	855	470	1050	3057	2900	1210.00	1132.00	M36X120	20	9.15	55.00	64.00			
DGC 17	9000	850000	300	520	530	1000	820	40	400	20	720	750	855	490	1050	3100	2900	1275.00	1132.00	M36X120	20	9.15	55.00	64.00			
DGC 17A	10730	1025000	320	540	580	1100	920	40	440	40	750	820	955	525	950	4196	4050	2030.00	1913.00	M36X120	20	9.65	60.00	72.00			
DGC 18	11800	1120000	320	620	580	1100	920	55	450	20	820	820	950	535	950	4370	4050	2198.00	1913.00	M36X150	20	9.65	60.00	72.00			
DGC 18A	12700	1200000	400	600	700	1250	1000	55	475	50	840	920	1050	560	825	5430	5200	3410.00	3179.00	M48X160	20	10.25	70.00	80.00			
DGC 19	15500	1470000	400	710	700	1250	1000	55	485	30	915	920	1050	560	825	5590	5200	3588.00	3179.00	M48X160	20	10.25	70.00	80.00			

All dimensions are subject to alteration without notice.

FACTORY WORKS :

Dharam Power Transmission Equipments Pvt. Ltd.

Add : Plot No. 1492, Industrial Estates, HSIDC, Rai, Sonapat (HR)

Tel.: 0130 - 6453492, Mob.: 09810191949

e-mail : dharampower@gmail.com website : www.omexgears.com

OUR PRODUCT RANGE

- Helical Gear boxes
- Helical Geared Motors
- Bevel Helical Gear boxes
- Worm Gear boxes
- Geared Couplings
- Helical Extruder Gear boxes
- Shaft Mounted Reducers
- Crane Duty Helical Gear boxes
- Mill Duty Helical Gear boxes up to 1500 HP
- EOT Over Head Cranes up to 150 tons
- Electric Wire Rope Hoist up to 32 tons



OMEX

Dealer Stamp

